


MULLION IS PLACED OVER BOTTOM BLOCK AND RAISED INTO POSITION. MULLION IS NOTCHED AT TOP TO FIT FLUSH INTO TOP FRP BLOCK.

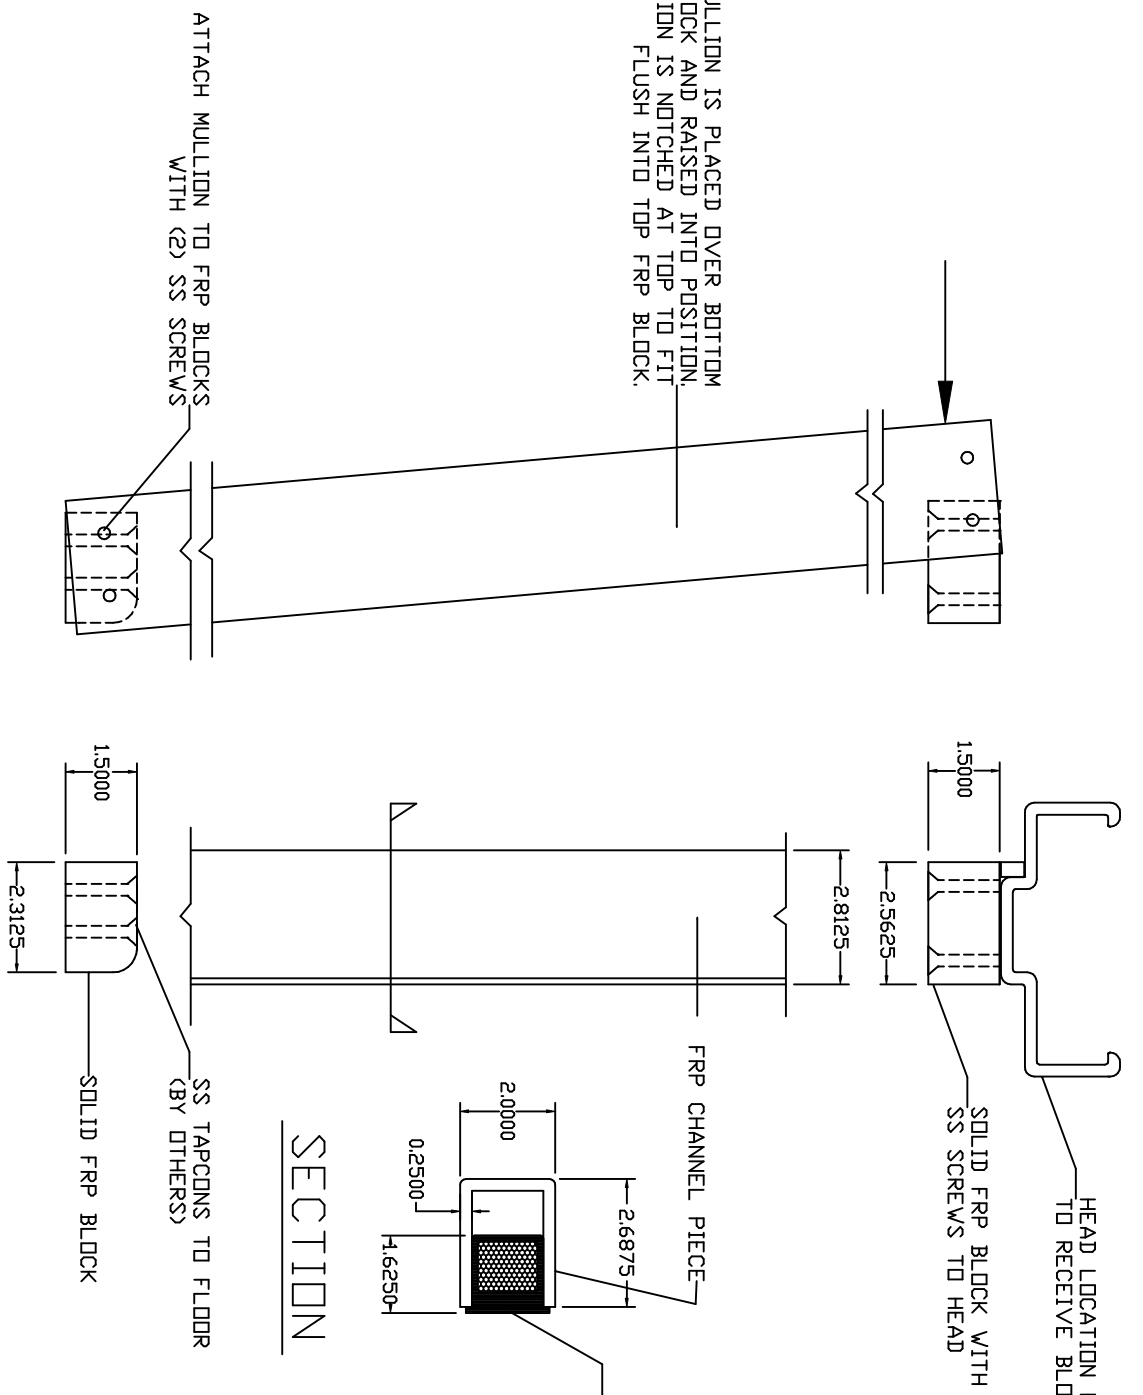

POLYISD INSULATED FRP CLOSER PIECE CHEMICALLY WELDED @ FACTORY TO RFP CHANNEL. NOTCHED T & B TO ALLOW MULLION TO FIT OVER BLOCK FOR A FLUSH APPEARANCE.

SECTION

MULLION SIDE ELEVATION

FRP DOOR RIM MULLION

Removable mullion @ pair of doors where rim

or surface vertical rod exit devices are used

UNIVERSAL PULTRUSIONS L.L.C  
 PD BOX 1289  
 MARSHALL, AR 72650  
 PH 870-448-4406  
 FX 870-448-5120

9/09

