

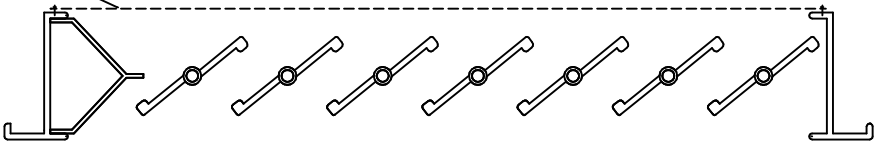



- NOTES:
- 1) ORDER LOUVER SIZE 1/4" SMALLER THEN OVERALL HEIGHT AND WIDTH OF ROUGH OPENING.
 - 2) FIXED LOUVERS SHALL BE FASTENED AT FACE OR JAMB OF LOUVER WITH SS SCREWS (by others)
 - 3) SS DR BRASS SCREENS AVAILABLE AS AN OPTION

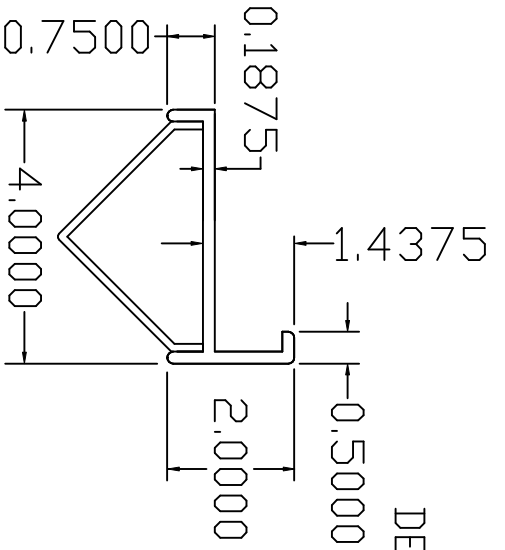



STAINLESS STEEL DR BRASS SCREEN AVAILABLE AS AN OPTION ON ALL STYLES

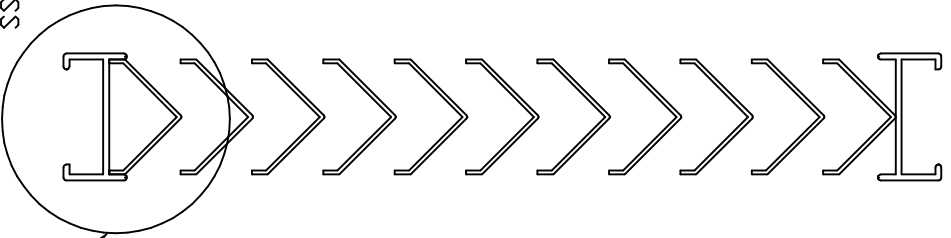


DETAIL A

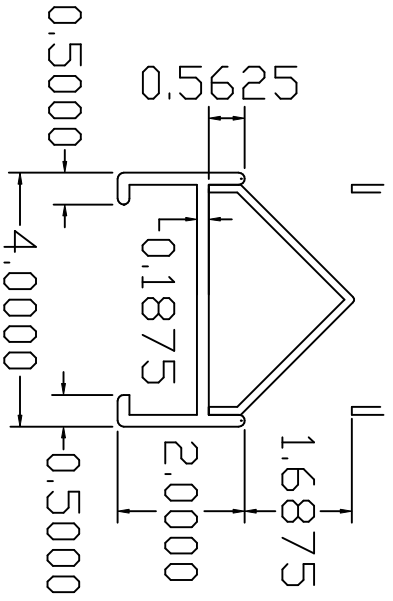

DETAIL B

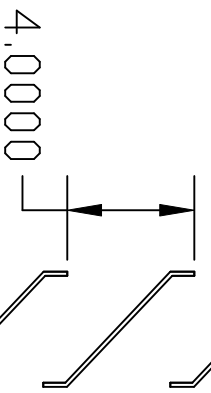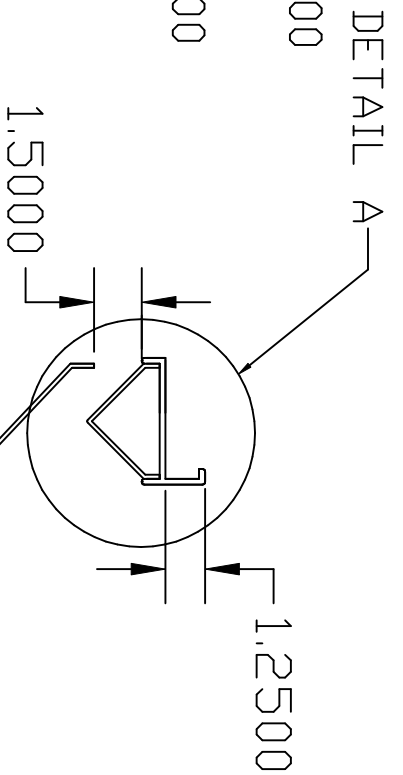

.1250 SOLID FRP BLADES TYPICAL

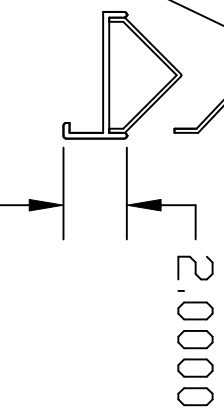

Fixed "Z"

Operable

Fixed Inverted "V"

WALL LOUVER BLADE PROFILES

Note: Door louvers are Inverted "Y" profile.

SHT 1/3

UNIVERSAL PULTRUSIONS L.L.C
 PO BOX 1289
 MARSHALL, AR 72650
 PH 870-448-4406
 FX 870-448-5120

10/09

